

SWITCH PLATE ASSEMBLY ALONG WITH USB & 3-PIN MOBILE CHARGING SOCKET
FOR LHB EOG NON-AC COACHES FOR AMRIT BHARAT RAKE




This document is prepared to EDML-243, Rev-Nil for Switch plate assemblies with Type - A & C USB type Mobile Charging Socket & 3-pin Socket 6A, 250V AC with 02 nos. 1.0 Amp Glass fuses (with fuse holders) for provision on either side of each cabin in LHB EOG Non-AC Coaches for Amrit Bharat Rake (with wider windows).

➤ **Table -1 FOR LHB EOG NON-AC LGS COACHES.**

SN	Description	Qty.	Marking on switches	Ref. Drg. No.	Remarks (Location)
1	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 03 nos. ON-OFF switches, 01 no. Type-A & C USB mobile charging socket & 01 no. 3-pin socket 6A,250V AC with 04 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	1 Set (1 set comprising 30 switch plates)	CS,F,CS	Drg. No. CC74261 Alt-'Nil', Item-1	Cabin & Corridor Area

➤ **Table -2 FOR LHB EOG NON-AC LSCN COACHES.**



SN	Description	Qty.	Marking on switches	Ref. Drg. No.	Remarks (Location)
1	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 04 nos. ON-OFF switches, 01 no. Type -A & C USB mobile charging socket & 01 no. 3-pin socket 6A,250V AC with 04 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 10 switch plates)	CS,F,F, CS	Drg. No. CC74261 Alt-'Nil', Item-2	Cabin Area
2	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 03 nos. ON-OFF switches, 01 no. Type -A & C USB mobile charging socket & 01 no. 3-pin socket 6A,250V AC with 04 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 10 switch plates)	CS,L,CS	Drg. No. CC74261 Alt-'Nil', Item-3	

EDML-243	Nil	29.11.2024				1 of 6
Doc. No.	Rev.	Date	SSE/CAD-VI	SEE/VD	Dy.CEE/DP	Page no.


3	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. ON-OFF switch and 01 no. Type -A & C USB mobile charging socket with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 20 switch plates)	CS	Drg. No. CC74261 Alt-'Nil', Item-4	Cabin Area (Lower Berth)
4	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 04 nos. ON-OFF switches and 01 no. Type -A & C USB mobile charging socket with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 10 switch plates)	F,L,NL,CS	Drg. No. CC74261 Alt-'Nil', Item-5	Corridor Area (Lower & Upper Berth)
5	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. ON-OFF switch and 01 no. 3-pin socket 6A,250V AC with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/equivalent* (with fuse holders)	01 Set (01 set comprising 10 switch plates)	CS	Drg. No. CC74261 Alt-'Nil', Item-6	

➤ Table -3 FOR LHB EOG NON-AC LSLRD COACHES.

SN	Description	Qty.	Marking on switches	Ref. Drg. No.	Remarks (Location)
1	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 04 nos. ON-OFF switches, 01 no. Type -A & C USB mobile charging socket & 01 no. 3-pin socket 6A,250V AC with 04 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 03 switch plates)	F,F CS,CS	Drg. No. CC74261 Alt-'Nil', Item-2	Cabin Area
2	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. ON-OFF switch and 01 no. Type -A & C USB mobile charging socket with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equiv.* (with fuse holders)	01 Set (01 set comprising 03 switch plates)	CS	Drg. No. CC74261 Alt-'Nil', Item-4	

EDML-243	Nil	29.11.2024				2 of 6
Doc. No.	Rev.	Date	SSE/CAD-VI	SEE/VD	Dy.CEE/DP	Page no.

3	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 02 nos. ON-OFF switches and 01 no. Type -A & C USB mobile charging socket with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 04 switch plates)	F,CS	Drg. No. CC74261 Alt-'Nil', Item-9	Corridor Area
4	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 04 nos. ON-OFF switches and 01 no. Type -A & C USB mobile charging socket with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 01 switch plates)	F,F, F,CS	Drg. No. CC74261 Alt-'Nil', Item-7	Disabled Cabin Area
5	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 02 nos. ON-OFF switches, 01 no. Type -A & C USB mobile charging socket & 01 no. 3-pin socket 6A, 250V AC with 04 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 01 switch plates)	CS,CS	Drg. No. CC74261 Alt-'Nil', Item-8	
6	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. ON-OFF switch and 01 no. 3-pin socket 6A,250V AC with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/equivalent* (with fuse holders)	01 Set (01 set comprising 01 switch plate)	CS	Drg. No. CC74261 Alt-'Nil', Item-6	Crew Room
7	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 03 nos. ON-OFF switches and 01 no. Type -A & C USB mobile charging socket with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/equivalent* (with fuse holders)	01 Set (01 set comprising 04 switch plates)	L,F,CS	Drg. No. CC74261 Alt-'Nil', Item-10	Guard Room & Crew Room

EDML-243	Nil	29.11.2024				3 of 6
Doc. No.	Rev.	Date	SSE/CAD-VI	SEE/VD	Dy.CEE/DP	Page no.

➤ Table -4 FOR LHB EOG NON-AC PANTRY CAR.

SN	Description	Qty.	Marking on switches	Ref. Drg. No.	Remarks (Location)
1	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 04 nos. ON-OFF switches, 01 no. Type -A & C USB mobile charging socket & 01 no. 3-pin socket 6A,250V AC with 04 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 03 switch plates)	CS, F,F,CS	Drg. No. CC74261 Alt-'Nil', Item-2	Cabin Area
2	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 04 nos. ON-OFF switches, 01 no. Type -A & C USB mobile charging socket & 01 no. 3-pin socket 6A,250V AC with 04 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 03 switch plates)	CS,L,NL, CS	Drg. No. CC74261 Alt-'Nil', Item-2	Cabin Area (Marking Different)
3	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. ON-OFF switch and 01 no. Type -A & C USB mobile charging socket with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 06 switch plates)	CS	Drg. No. CC74261 Alt-'Nil', Item-4	Cabin Area (Lower Berth)
4	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 02 nos. ON-OFF switches.	01 Set (01 set comprising 03 switch plates)	F,L	Drg. No. CC74261 Alt-'Nil', Item-11	Corridor Area
5	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. ON-OFF switch.	01 Set (01 set comprising 01 switch plate)	F	Drg. No. CC74261 Alt-'Nil', Item-12	Pantry Area

EDML-243	Nil	29.11.2024				4 of 6
Doc. No.	Rev.	Date	SSE/CAD-VI	SEE/VD	Dy.CEE/DP	Page no.

10/4

EDML-243, Rev.-'Nil'

6	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 02 nos. ON-OFF switches.	01 Set (01 set comprising 05 switch plates)	F,F	Drg. No. CC74261 Alt-'Nil', Item-11	Pantry Area (Marking Different)
7	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. ON-OFF switch and 01 no. 3-pin socket 6A,250V AC with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/equivalent* (with fuse holders) (for 03-Nos water purifier)	01 Set (01 set comprising 03 switch plates)	S	Drg. No. CC74261 Alt-'Nil', Item-6	Pantry Equipments (Marking Different)
8	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. 16A, 250V AC ON-OFF switch and 01 no. 6/16,250V AC Socket. (for 02-Nos. Refrigerator, 01 No. Deep Freezer & 02-Nos. Hot/Cold under storage)	01 Set (01 set comprising 05 switch plates)	S	Drg. No. CC74261 Alt-'Nil', Item-13	Pantry Equipments


* Equivalent with the approval from the office of CEDE/RCF.

Packing conditions of switch plates shall be as follows:

- Stage 1: Standard packing of switch plates mentioned above as per packing conditions document no. PI042.
- Stage 2: Packing per coach set as per Packing Conditions Document No. PI021. Each packing shall be legibly marked for the Type of coach applicable for.
- Stage 3: Bulk packing coach wise as per Packing Conditions Document No. PI032. Each packing shall be legibly marked for the type of coach/coaches applicable for.

N.B :

- Firm shall get prototype sample approved from CEDE/RCF before commencing bulk supply.
- Switches shall be conforming to IS: 3854-1997 and Socket shall conform to IS: 1293-2019 or latest. Both shall be 'ISI' marked.
- Wiring for switch, socket to be provided with 1.5 sq.mm E-Beam cable to specification no. ELRS/SPEC/ELC/0019, latest applicable & procured from RDSO approved sources.
- For contact opening in Switch, Normal Gap Construction shall be followed as per Clause No. 7.1.2 of IS: 3854-1997
- 3-pin mobile charging socket without locking arrangement/shutter shall be provided.

EDML-243	Nil	29.11.2024				5 of 6
Doc. No.	Rev.	Date	SSE/CAD-VI	SEE/VD	Dy.CEE/DP	Page no.



EDML-243, Rev.-'Nil'

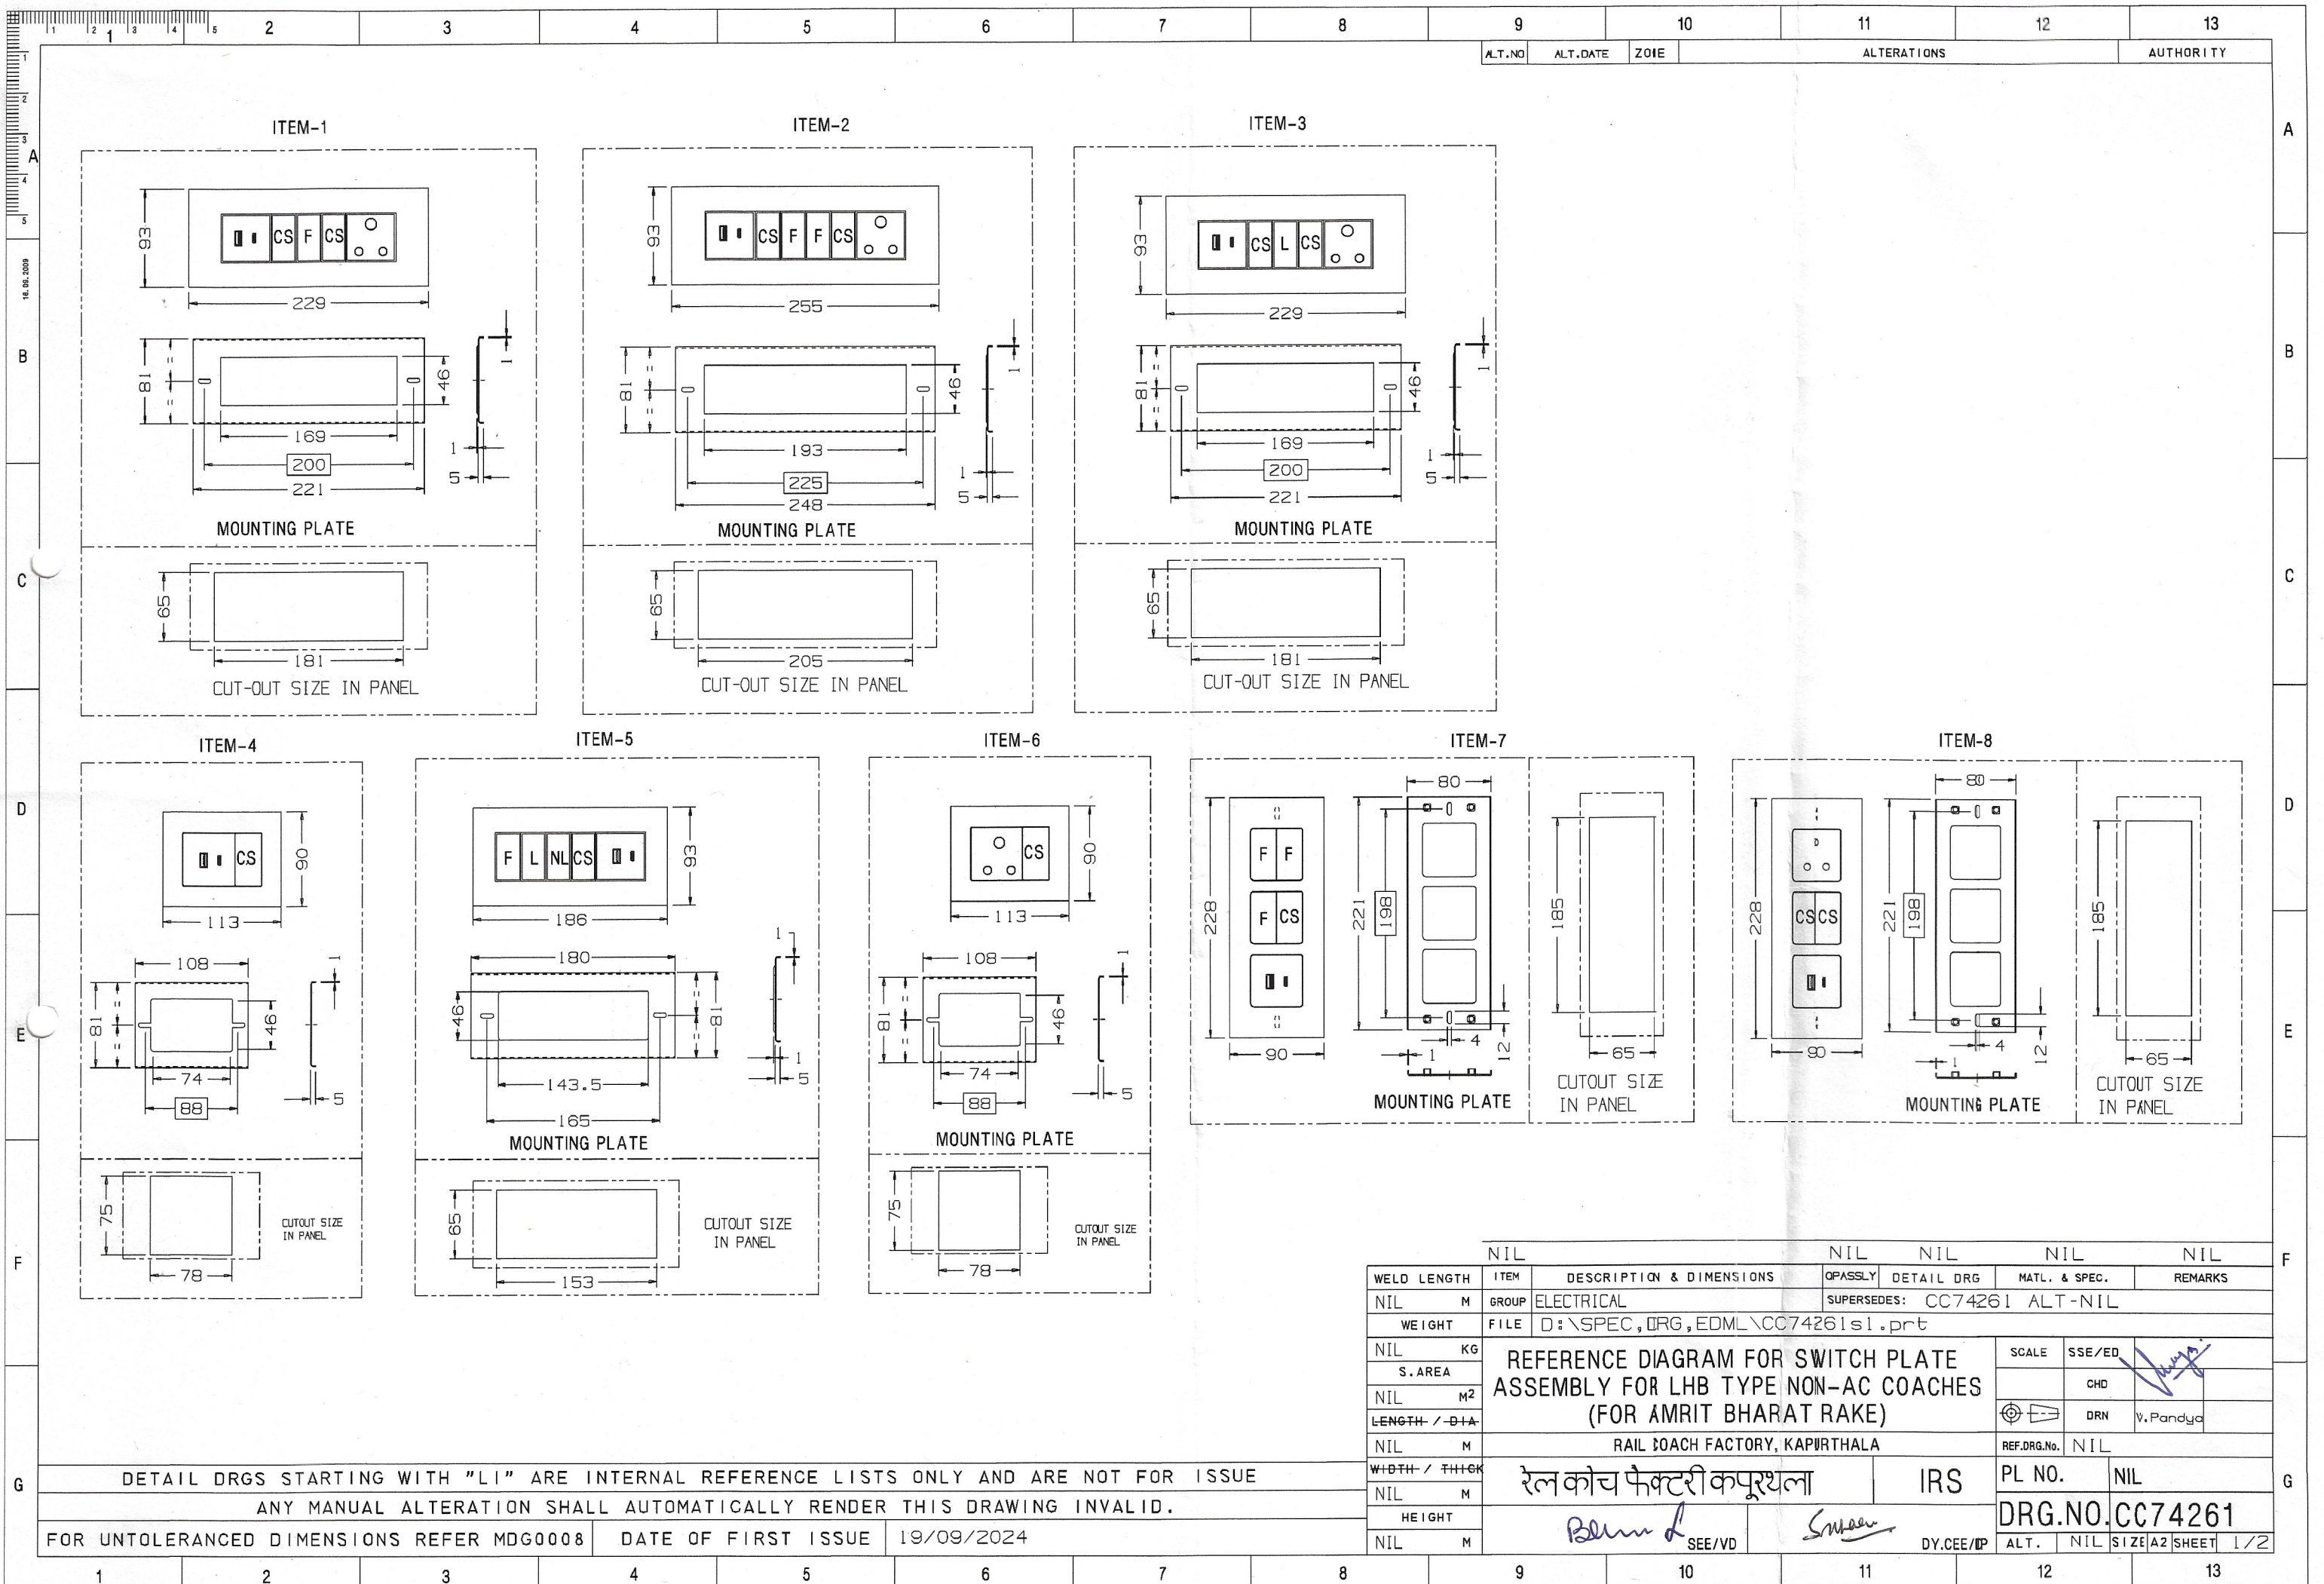
- vi. Wiring terminal details: - Terminals for connection of wires shall be provided as per the following detail. For LHB EOG type SCN coaches (with wider windows):-1.0A fuse in Phase only & 1.0A fuse spare.
- vii. Method of Activation of Switch shall be of Rocker Type as per Clause No. 7.1.5 of IS: 3854-1997.
- viii. Switch shall be installed as per Design A mentioned in the Clause No. 7.1.7 of IS: 3854-1997.
- ix. Switch and Socket shall be screwed Type on powder coated steel/GI without powder coated base plate of minimum thickness 1.0 mm with M3 screws with nut and spring washer/Snap fit modular Type with insert moulded metal frame in fire retardant polycarbonate plate.
- x. The Module with Type-A & C USB Charger shall conform to Spec. No. EDTS-455, Rev-Nil, Am-1, Corr-1.
- xi. Dimensions are shown for reference only. Supplier shall get prior approval of drawing before prototype/ bulk supplies. The Module shall be suitable for fitment in existing Switch Plates provided in LHB type AC/Non-AC Coaches.

Tests :

Following test shall be conducted from Govt. / NABL Accredited Lab:-

1. Test for Polymer identification of FR Polycarbonate Material.
2. Fire retardant test to grade UL-94 V0 from the OEM of the Raw Material.

EDML-243	Nil	29.11.2024				6 of 6
Doc. No.	Rev.	Date	SSE/CAD-VI	SEE/VD	Dy.CEE/DP	Page no.



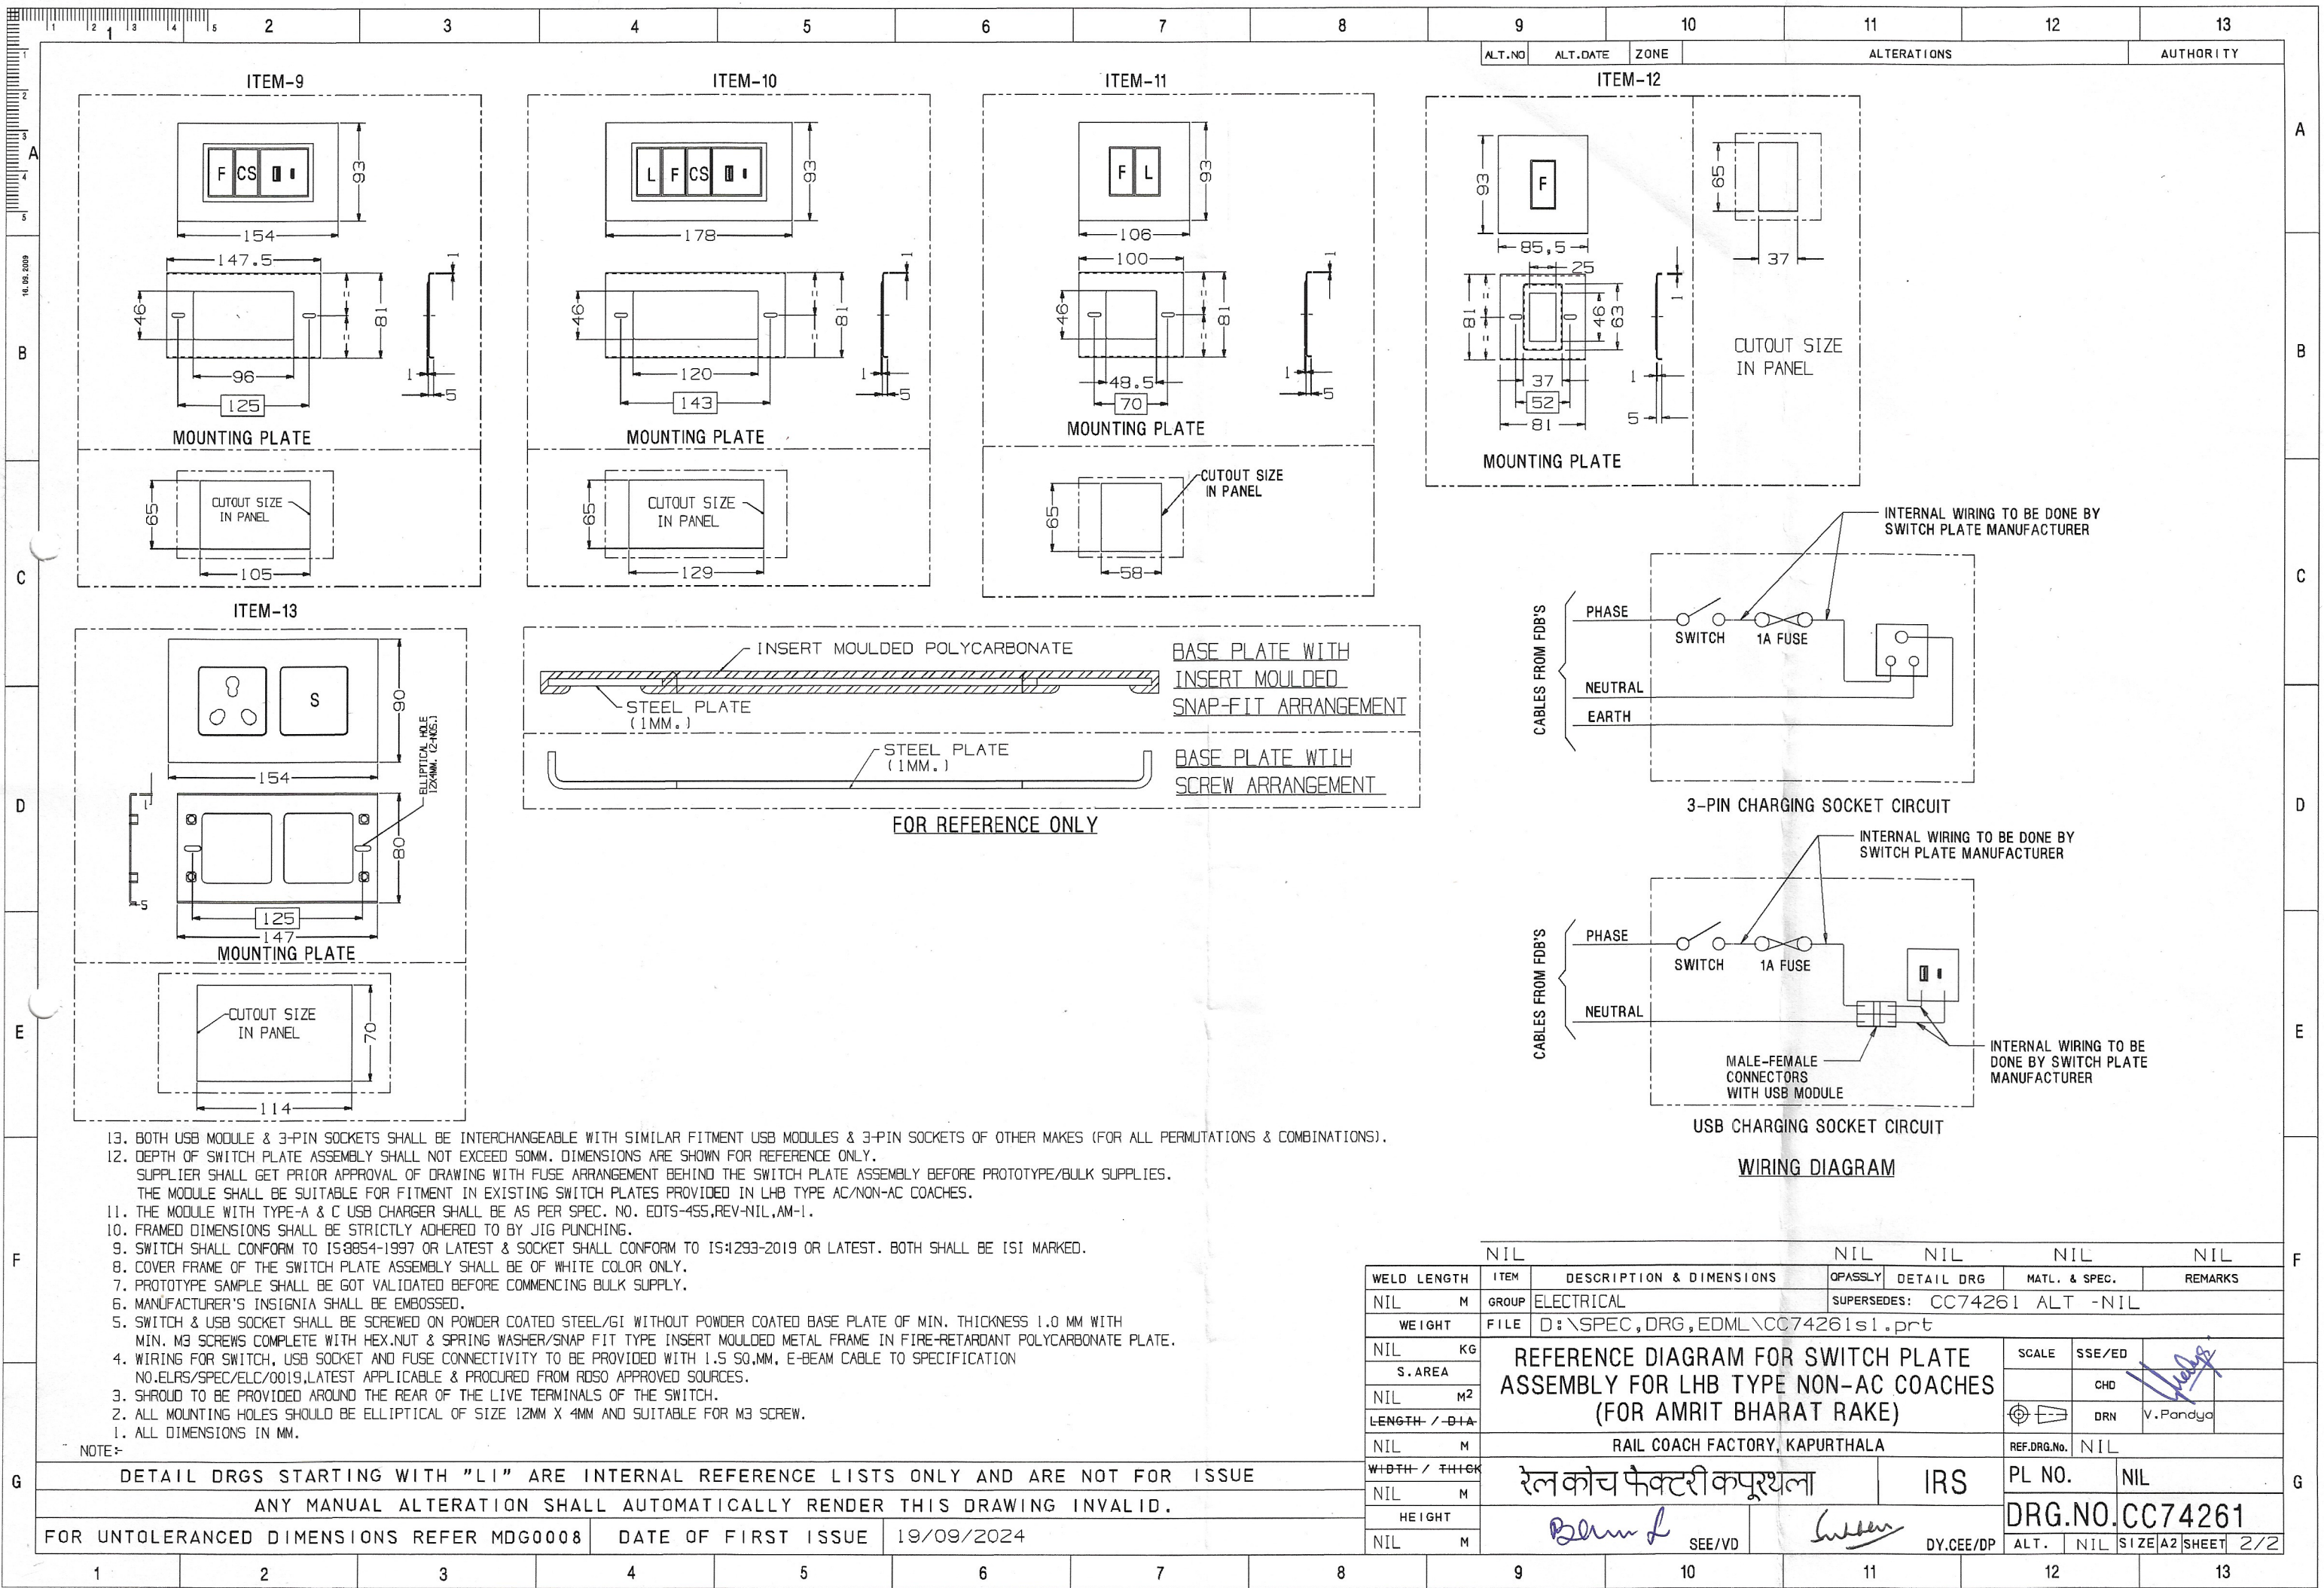
NIL		NIL		NIL		NIL		
WELD LENGTH	ITEM	DESCRIPTION & DIMENSIONS		OPASSLY	DETAIL DRG	MATL. & SPEC.	REMARKS	
NIL	M	GROUP	ELECTRICAL	SUPERSEDES: CC74261 ALT-NIL				
WEIGHT	FILE	D:\SPEC, DRG, EDML\CC74261s1.prt						
NIL	KG	REFERENCE DIAGRAM FOR SWITCH PLATE ASSEMBLY FOR LHB TYPE NON-AC COACHES (FOR AMRIT BHARAT RAKE)				SCALE	SSE/ED	
S.AREA							CHD	
NIL	M ²						DRN	V. Pandya
LENGTH / DIA								
NIL	M	RAIL COACH FACTORY, KAPURTHALA				REF.DRG.No.	NIL	
WIDTH / THICK		रेल कोच फैक्टरी कपूरथला		IRS	PL NO.	NIL		
NIL	M	Bann L		Smeew	DRG.NO. CC74261			
HEIGHT		SEE/VD		DY.CEE/DP	ALT.	NIL	SIZE A2 SHEET 1/2	
NIL	M							

DETAIL DRGS STARTING WITH "LI" ARE INTERNAL REFERENCE LISTS ONLY AND ARE NOT FOR ISSUE

ANY MANUAL ALTERATION SHALL AUTOMATICALLY RENDER THIS DRAWING INVALID.

FOR UNTOLERANCED DIMENSIONS REFER MDG0008

DATE OF FIRST ISSUE 19/09/2024






CORR-1 FOR SWITCH PLATE ASSEMBLY ALONG WITH USB & 3-PIN MOBILE CHARGING SOCKET
FOR LHB EOG NON-AC COACHES FOR AMRIT BHARAT RAKE

This document is prepared to EDML-243, Rev-Nil for removal of spare/extra 1.0 Amp. Glass fuses (with holders) in Switch plate assemblies with Type - A & C USB type Mobile Charging Socket & 3-pin Socket 6A, 250V AC and revision of switch plate assemblies for LHB EOG Non AC Pantry Coach (Amrit Bharat Rake).




1. **Spare 1.0 Amp** Glass fuse (with fuse holders) in Switch plate assemblies each with Type - A & C USB type Mobile Charging Socket & 3-pin Socket 6A, 250V AC **stands deleted**. i.e. Only **01 No.** 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders) is to be provided each for Type - A & C USB type Mobile Charging Socket & 3-pin Socket 6A, 250V AC. This is applicable for Table-1,2 and 3.
2. **Drg. No. CC74261, Alt-Nil** shall be read as **Drg. No. CC74261, Alt-'a'**.
3. **Table-4 updated in reference to revised ICF Drawing No. LWCB/PP-7-4-001, Alt-'a'** shall be read as under:-

➤ **Table -4 FOR LHB EOG NON-AC PANTRY CAR.**

SN	Description	Qty.	Marking on switches	Ref. Drg. No.	Remarks (Location)
1	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 04 nos. ON-OFF switches, 01 no. Type -A & C USB mobile charging socket & 01 no. 3-pin socket 6A,250V AC with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 03 switch plates)	CS, F,F,CS	Drg. No. CC74261 Alt-'a', Item-2	Cabin Area
2	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 04 nos. ON-OFF switches, 01 no. Type -A & C USB mobile charging socket & 01 no. 3-pin socket 6A,250V AC with 02 nos. 1.0 Amp Glass fuses of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 03 switch plates)	CS,L,F, CS	Drg. No. CC74261 Alt-'a', Item-2	Cabin Area (Marking Different)
3	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. ON-OFF switch and 01 no. Type -A & C USB mobile charging socket with 01 no. 1.0 Amp Glass fuse of M/s Ferraz Shawmut/ Copper Bussmann/ equivalent* (with fuse holders)	01 Set (01 set comprising 06 switch plates)	CS	Drg. No. CC74261 Alt-'a', Item-4	Cabin Area (Lower Berth)

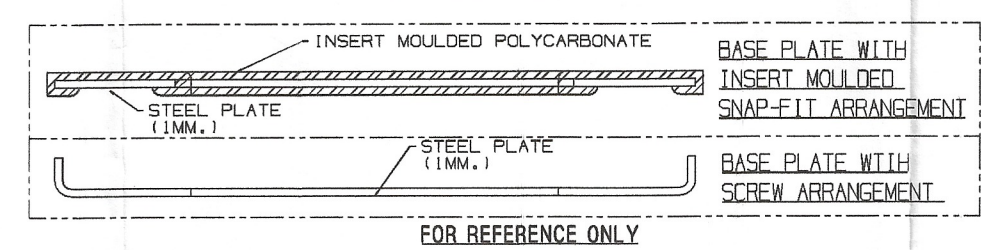
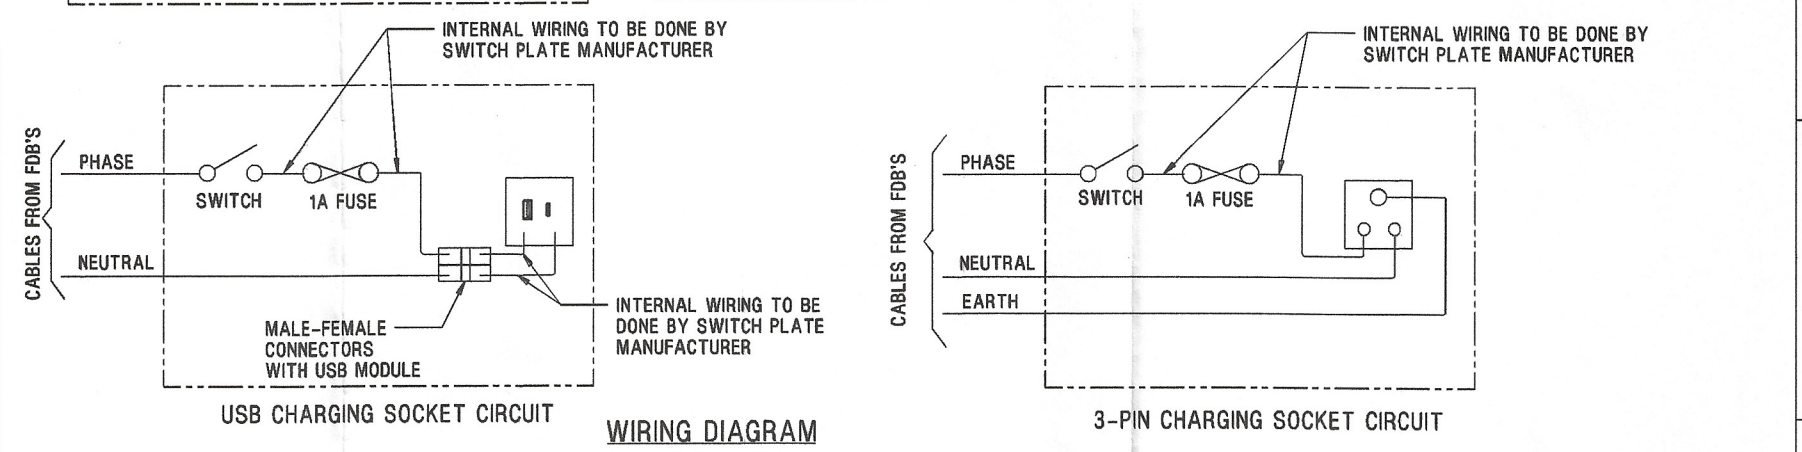
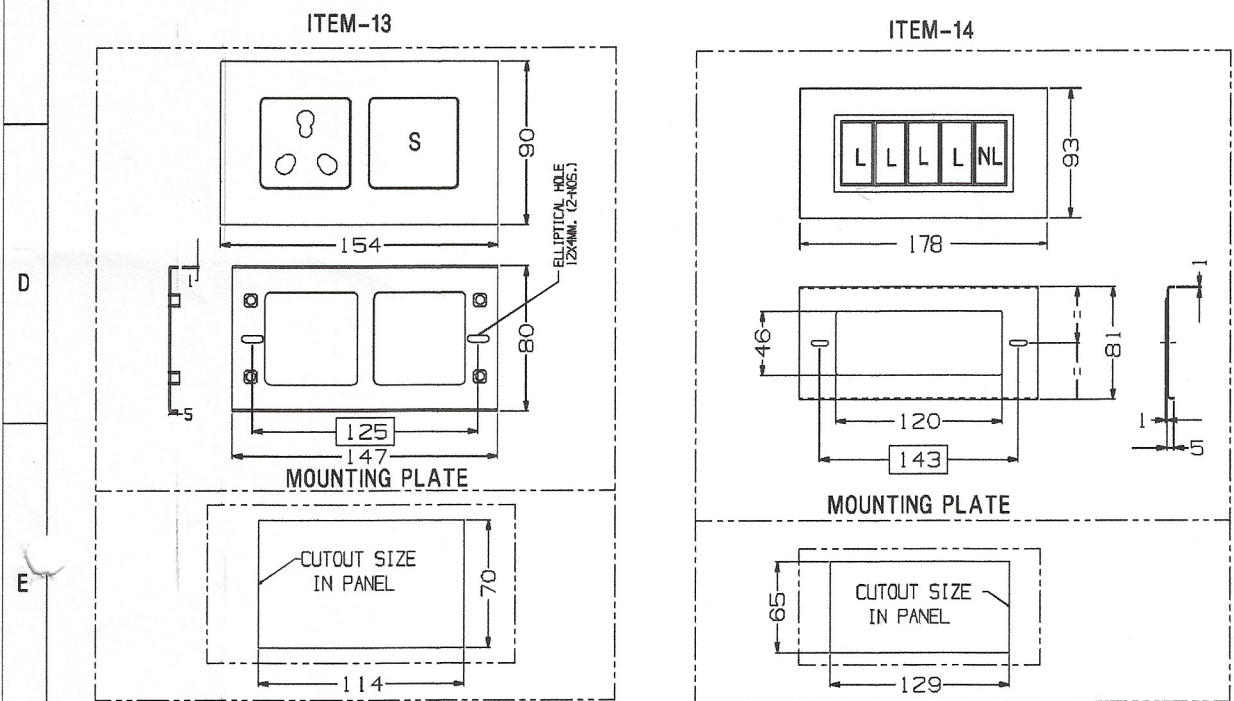
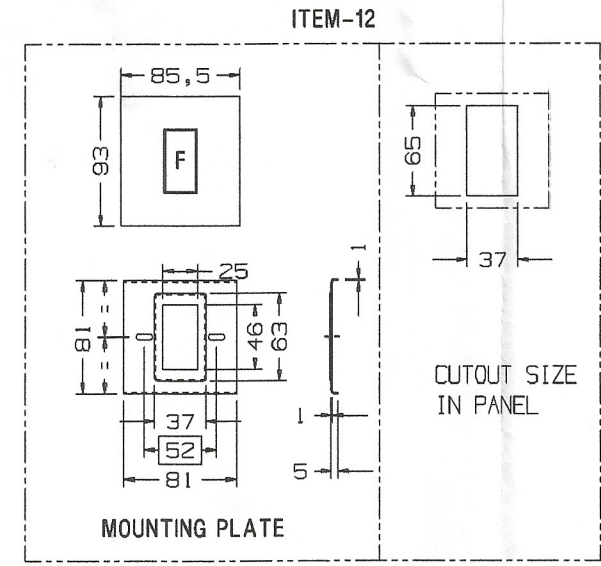
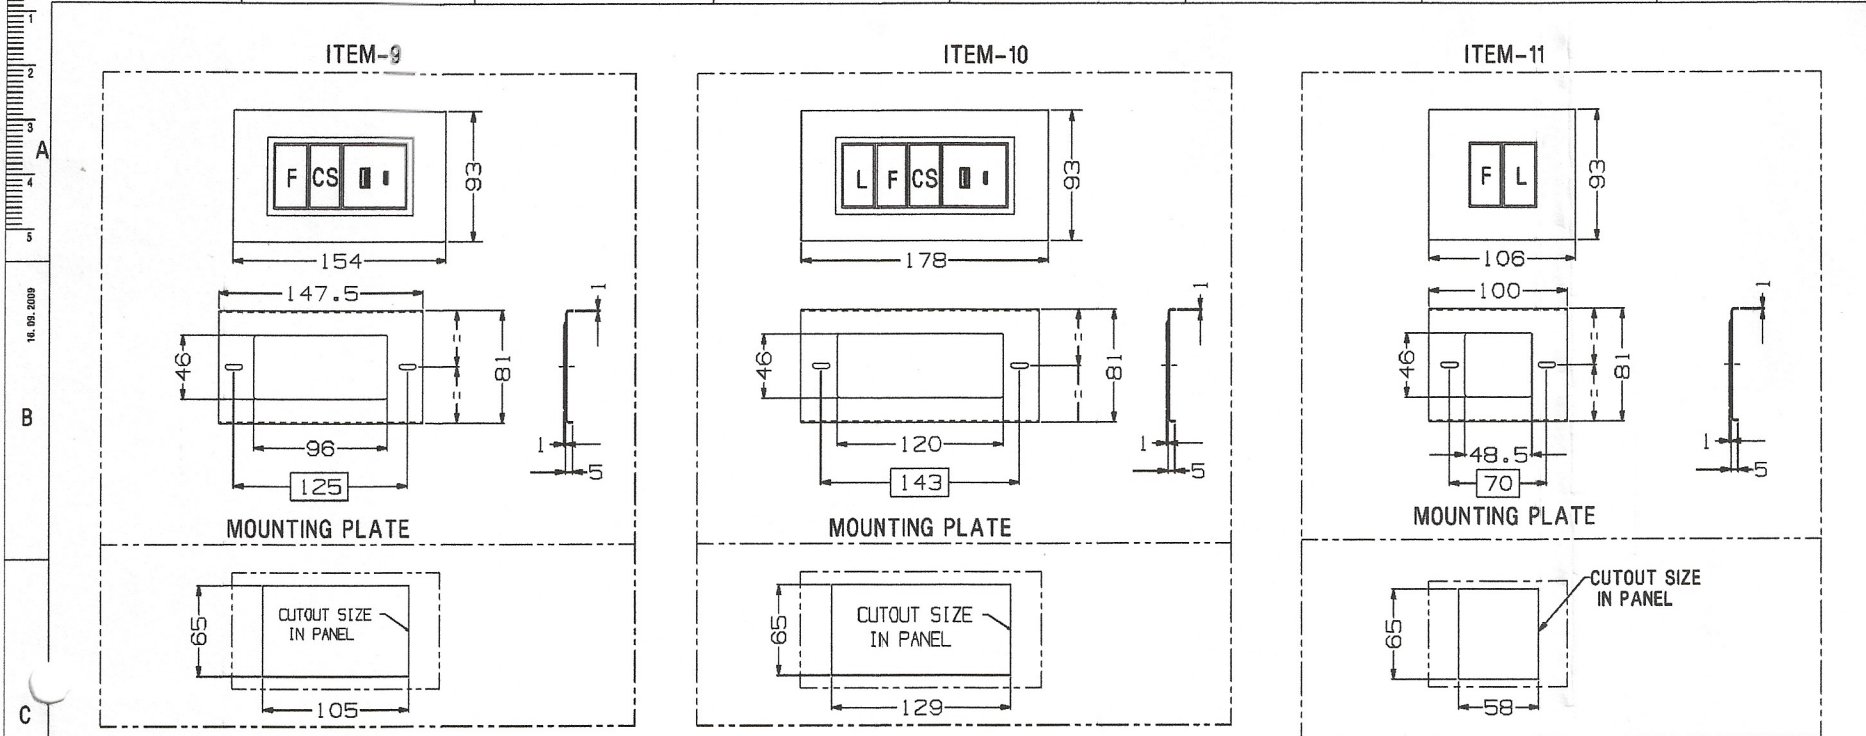
EDML-243	Corr-1	06.01.2025				1 of 2
Spec. No.	Doc. No.	Date	SSE/CAD-VI	SEE/VD	Dy.CEE/DP	Page no.

4	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 02 nos. ON-OFF switches.	01 Set (01 set comprising 01 switch plates)	L,F	Drg. No. CC74261 Alt-'a', Item-11	Service Counter Area
5	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 02 nos. ON-OFF switches.	01 Set (01 set comprising 03 switch plates)	L,NL	Drg. No. CC74261 Alt-'a', Item-11	Corridor Area (Marking Different)
6	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 02 nos. ON-OFF switches.	01 Set (01 set comprising 01 switch plates)	L,L	Drg. No. CC74261 Alt-'a', Item-11	Corridor Area (Marking Different)
7	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 05 nos. ON-OFF switches.	01 Set (01 set comprising 01 switch plate)	L,L,L,L,NL	Drg. No. CC74261 Alt-'a', Item-14	Corridor Area
8	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 05 nos. ON-OFF switches.	01 Set (01 set comprising 02 switch plate)	F,F,F,F,F	Drg. No. CC74261 Alt-'a', Item-14	Corridor Area (Marking Different)
9	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 05 nos. ON-OFF switches.	01 Set (01 set comprising 01 switch plate)	L,L,L,NL, SP	Drg. No. CC74261 Alt-'a', Item-14	Corridor Area (Marking Different)
10	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. ON-OFF switch and 01 no. 3-pin socket 6A,250V AC with 01 no. 1.0 Amp Glass fuse of M/s Ferraz Shawmut/ Copper Bussmann/equivalent* (with fuse holders) (for 03-Nos water purifier)	01 Set (01 set comprising 03 switch plates)	S	Drg. No. CC74261 Alt-'a', Item-6	Pantry Equipments (Marking Different)
11	Switch plate assembly complete with polycarbonate cover frame and powder coated steel plate with 01 no. 16A, 250V AC ON-OFF switch and 01 no. 6/16,250V AC Socket. (for 02-Nos. Refrigerator, 01 No. Deep Freezer & 02-Nos. Hot/Cold under storage)	01 Set (01 set comprising 05 switch plates)	S	Drg. No. CC74261 Alt-'a', Item-13	Pantry Equipments

EDML-243	Corr-1	06.01.2025				2 of 2
Spec. No.	Doc. No.	Date	SSE/CAD-VI	SEE/VD	Dy.CEE/DP	Page no.

1	2	3	4	5	6	7	8	9	10	11	12	13
---	---	---	---	---	---	---	---	---	----	----	----	----

ALT.NO	ALT.DATE	ZONE	ALTERATIONS	AUTHORITY
a	30.12.2024	ALL	1. ITEM-14 ADDED. 2. DRAWING UPDATED ACCORDINGLY.	GR NO-2300240024



13. BOTH USB MODULE & 3-PIN SOCKETS SHALL BE INTERCHANGEABLE WITH SIMILAR FITMENT USB MODULES & 3-PIN SOCKETS OF OTHER MAKES (FOR ALL PERMUTATIONS & COMBINATIONS).
12. DEPTH OF SWITCH PLATE ASSEMBLY SHALL NOT EXCEED 50MM. DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.
- SUPPLIER SHALL GET PRIOR APPROVAL OF DRAWING WITH FUSE ARRANGEMENT BEHIND THE SWITCH PLATE ASSEMBLY BEFORE PROTOTYPE/BULK SUPPLIES.
- THE MODULE SHALL BE SUITABLE FOR FITMENT IN EXISTING SWITCH PLATES PROVIDED IN LHB TYPE AC/NON-AC COACHES.
11. THE MODULE WITH TYPE-A & C USB CHARGER SHALL BE AS PER SPEC. NO. EDTS-455,REV-NIL,AM-1.
10. FRAMED DIMENSIONS SHALL BE STRICTLY ADHERED TO BY JIG PUNCHING.
9. SWITCH SHALL CONFORM TO IS:8854-1997 OR LATEST & SOCKET SHALL CONFORM TO IS:1293-2019 OR LATEST. BOTH SHALL BE ISI MARKED.
8. COVER FRAME OF THE SWITCH PLATE ASSEMBLY SHALL BE OF WHITE COLOR ONLY.
7. PROTOTYPE SAMPLE SHALL BE GOT VALIDATED BEFORE COMMENCING BULK SUPPLY.
6. MANUFACTURER'S INSIGNIA SHALL BE EMBOSSED.
5. SWITCH & USB SOCKET SHALL BE SCREWED ON POWDER COATED STEEL/GI WITHOUT POWDER COATED BASE PLATE OF MIN. THICKNESS 1.0 MM WITH MIN. M3 SCREWS COMPLETE WITH HEX.NUT & SPRING WASHER/SNAP FIT TYPE INSERT MOULDED METAL FRAME IN FIRE-RETARDANT POLYCARBONATE PLATE.
4. WIRING FOR SWITCH, USB SOCKET AND FUSE CONNECTIVITY TO BE PROVIDED WITH 1.5 SQ.MM, E-BEAM CABLE TO SPECIFICATION NO.ELRS/SPEC/ELC/0019,LATEST APPLICABLE & PROCURED FROM RDSO APPROVED SOURCES.
3. SHROUD TO BE PROVIDED AROUND THE REAR OF THE LIVE TERMINALS OF THE SWITCH.
2. ALL MOUNTING HOLES SHOULD BE ELLIPTICAL OF SIZE 12MM X 4MM AND SUITABLE FOR M3 SCREW.
1. ALL DIMENSIONS IN MM.
- NOTE:-

DETAIL DRGS STARTING WITH "LI" ARE INTERNAL REFERENCE LISTS ONLY AND ARE NOT FOR ISSUE

ANY MANUAL ALTERATION SHALL AUTOMATICALLY RENDER THIS DRAWING INVALID.

FOR UNTOLERANCED DIMENSIONS REFER MDG0008

DATE OF FIRST ISSUE 19/09/2024

WELD LENGTH	ITEM	DESCRIPTION & DIMENSIONS	QPASSLY	DETAIL DRG	MATL. & SPEC.	REMARKS
NIL	M	GROUP ELECTRICAL				
WEIGHT	FILE	D:\SPEC,DRG,EDML\CC74261sl.prt				
NIL	KG					
S.AREA						
NIL	M ²					
LENGTH / DIA						
NIL	M					
WIDTH / THICK						
NIL	M					
HEIGHT						
NIL	M					

REFERENCE DIAGRAM FOR SWITCH PLATE ASSEMBLY FOR LHB TYPE NON-AC COACHES (FOR AMRIT BHARAT RAKE)

RAIL COACH FACTORY, KAPURTHALA

रेल कोच फैक्टरी कपूरथला

IRS

SCALE SSE/ED

CHD

DRN V.Pandya

REF.DRG.No. NIL

PL NO. NIL

DRG.NO. CC74261

ALT: a

SIZE A2 SHEET 2/2

SEE/VD

DY.CEE/DP

1	2	3	4	5	6	7	8	9	10	11	12	13
---	---	---	---	---	---	---	---	---	----	----	----	----